


#11000 LED 35


- 120-347 V
- 0-10 V Dimmable
- CRI 80
- 50,000 hours
- 90° beam angle
- Type V Distribution
- Wet Rated
- Bronze Powder Coated
- Die Cast Aluminum
- 18.5 lbs
- Equivalent to 100W HID
- Lumens: 4080/4400/4300

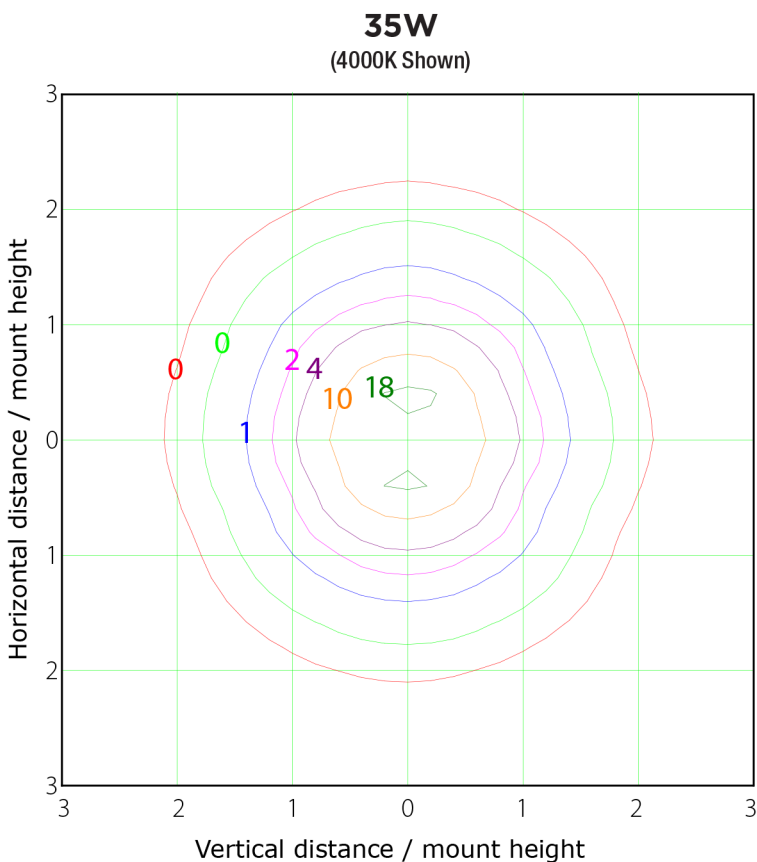

Mounting Height: 10.0m Max Lux(100%): 20.3 lx

(1%): 0.2 lx	(2%): 0.4 lx
(5%): 1.0 lx	(10%): 2.0 lx
(20%): 4.1 lx	(50%): 10.2 lx
(90%): 18.3 lx	(100%): 20.3 lx


C Plane (°):0.0-360.0: 22.5 Gamma Plane (°):0.0-180.0:1.0
 Test Lab: Test Device: GPM-1800B
 Test Type: TYPE C Distance: 8.190 m
 Temperature: Humidity:
 Operator: Inspector:

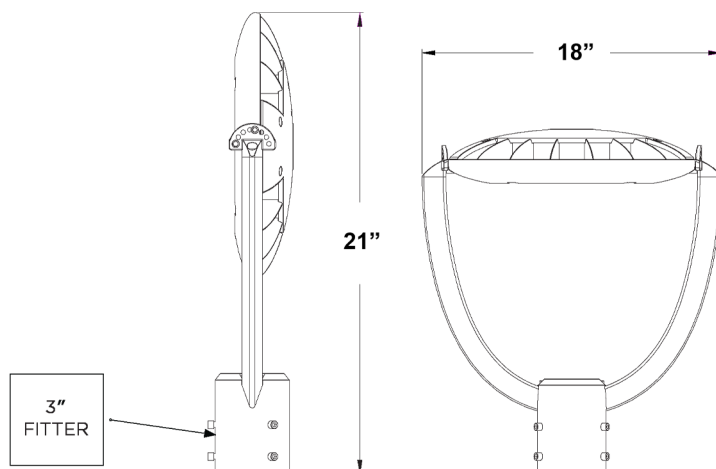

#11000 LED 55

- 120-347 V
- 0-10 V Dimmable
- CRI 80
- 50,000 hours
- 90° beam angle
- Type V Distribution
- Wet Rated
- Bronze Powder Coated
- Die Cast Aluminum
- 18.5 lbs
- Equivalent to 150W HID
- Lumens: 6890/7500/7280

55W
(4000K Shown)

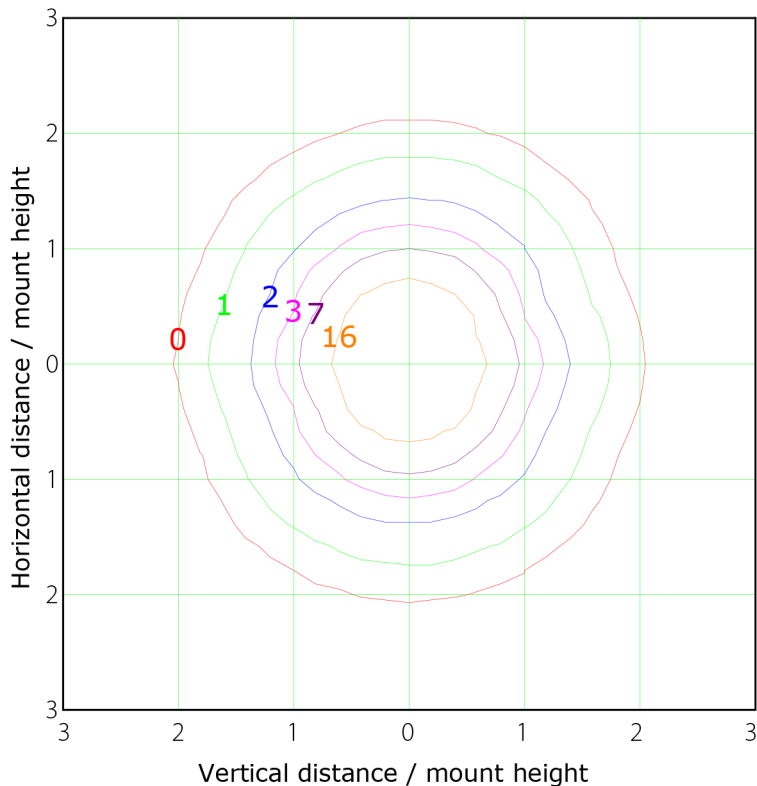

Mounting Height: 10.0m Max Lux(100%): 32.8 lx

(1%): 0.3 lx	(2%): 0.7 lx
(5%): 1.6 lx	(10%): 3.3 lx
(20%): 6.6 lx	(50%): 16.4 lx
(100%): 32.8 lx	

C Plane (°):0.0-360.0: 22.5 Gamma Plane (°):0.0-180.0:1.0
 Test Lab: Test Device: GPM-3000
 Test Type: TYPE C Distance: 14.040 m [K=1.0000]
 Temperature: 30.2 'C Humidity:
 Operator: Inspector:




ColorQuick™
Selectable Color Technology

Switch to/from the following CCT




Dark Sky Compliant
when angled at
0° horizontal plane
(35W & 55W)

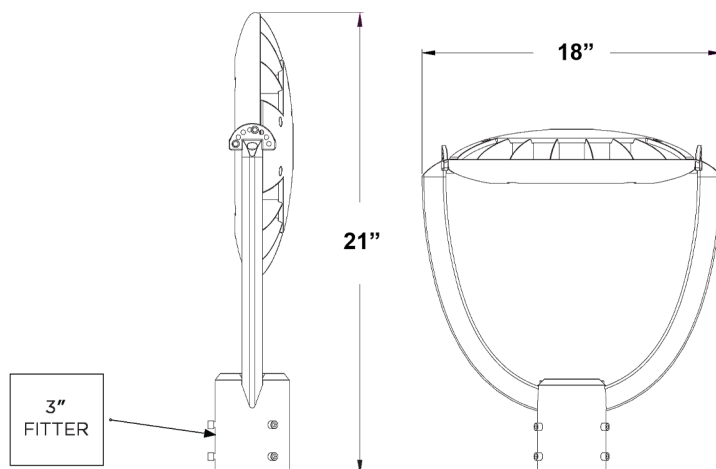

#11000 LED 75

- 120-347 V
- 0-10 V Dimmable
- CRI 80
- 50,000 hours
- 90° beam angle
- Type V Distribution
- Wet Rated
- Bronze Powder Coated
- Die Cast Aluminum
- 18.5 lbs
- Equivalent to 175W HID
- Lumens: 9220/10100/9720

75W
(4000K Shown)

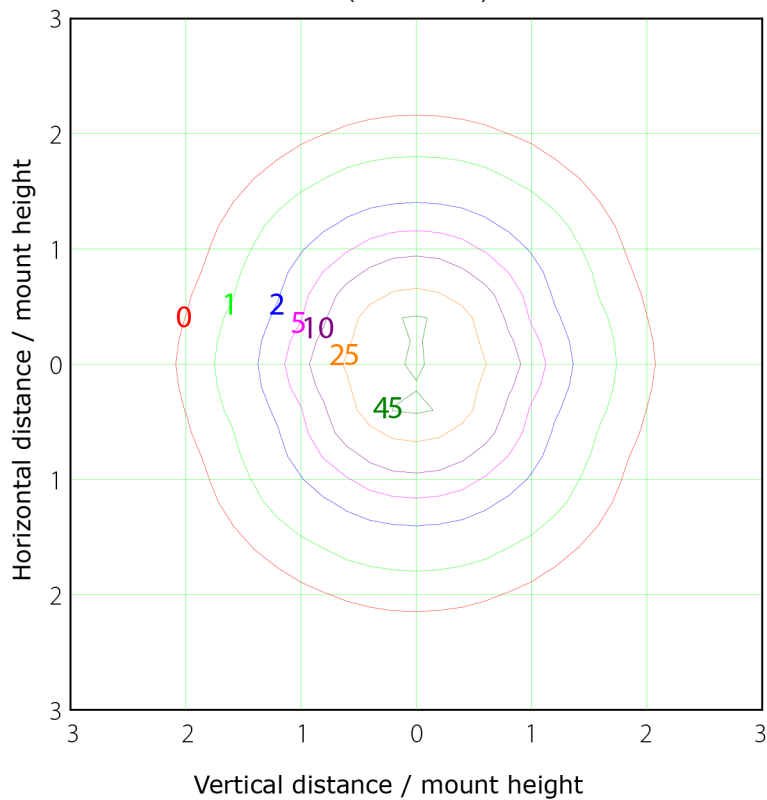

Mounting Height: 10.0m Max Lux(100%): 49.7 lx

(1%): 0.5 lx	(2%): 1.0 lx
(5%): 2.5 lx	(10%): 5.0 lx
(20%): 9.9 lx	(50%): 24.8 lx
(90%): 44.7 lx	(100%): 49.7 lx


C Plane (°):0.0-360.0: 22.5 Gamma Plane (°):0.0-180.0:1.0
 Test Lab: Test Device: GPM-1800B
 Test Type: TYPE C Distance: 8.190 m
 Temperature: Humidity:
 Operator: Inspector:



ColorQuick™
Selectable Color Technology

Switch to/from the following CCT


3000K 4000K 5000K

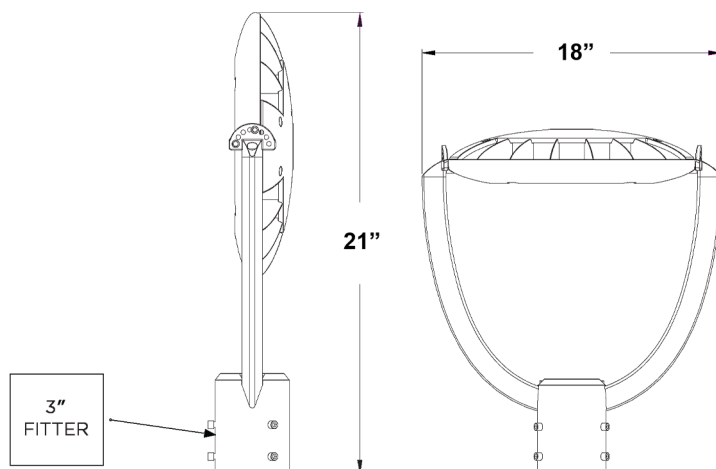

#11000 LED 100

- 120-347 V
- 0-10 V Dimmable
- CRI 80
- 50,000 hours
- 90° beam angle
- Type V Distribution
- Wet Rated
- Bronze Powder Coated
- Die Cast Aluminum
- 18.5 lbs
- Equivalent to 225-250W HID
- Lumens: 12000/13500/12806

100W
(4000K Shown)

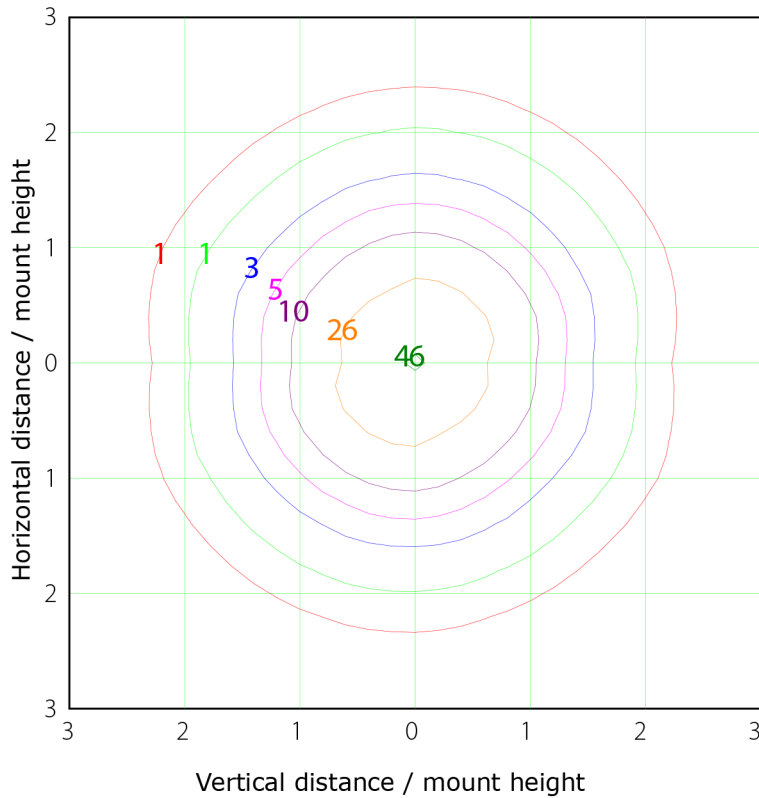

Mounting Height: 10.0m Max Lux(100%): 51.3 lx

(1%): 0.5 lx	(2%): 1.0 lx
(5%): 2.6 lx	(10%): 5.1 lx
(20%): 10.3 lx	(50%): 25.7 lx
(90%): 46.2 lx	(100%): 51.3 lx

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:



ColorQuick™
Selectable Color Technology

Switch to/from the following CCT

3000K 4000K 5000K

