


#11000 LED 55

- 120-347 V
- 0-10 V Dimmable
- CRI 80
- 50,000 hours
- 90° beam angle
- Type V Distribution
- Wet Rated
- Bronze Powder Coated
- Die Cast Aluminum
- 18.5 lbs
- Equivalent to 150W HID
- Lumens: 6890/7500/7280

55W
(4000K Shown)

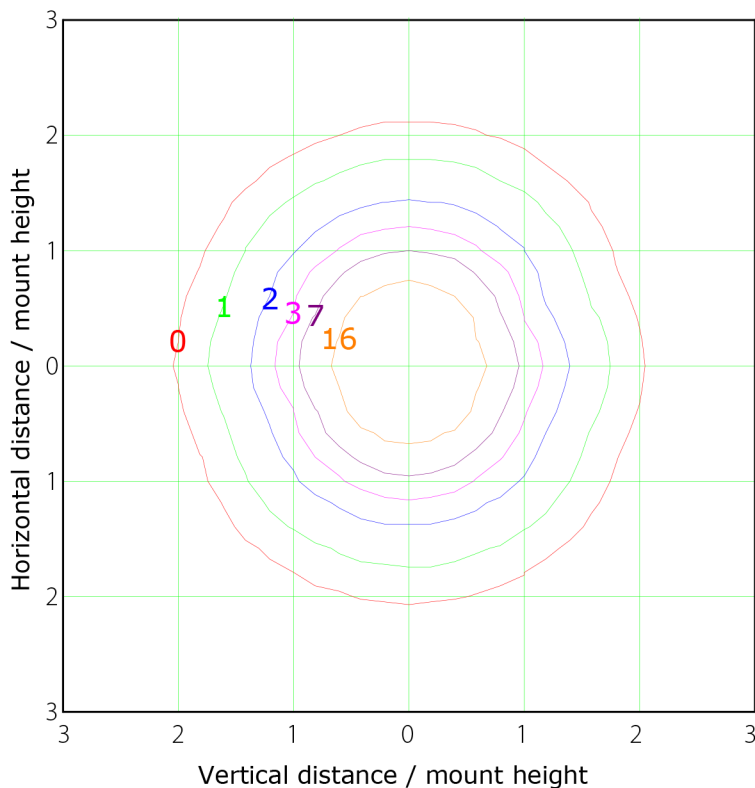

Mounting Height: 10.0m Max Lux(100%): 32.8 lx

(1%): 0.3 lx	(2%): 0.7 lx
(5%): 1.6 lx	(10%): 3.3 lx
(20%): 6.6 lx	(50%): 16.4 lx
(100%): 32.8 lx	

C Plane (°):0.0-360.0: 22.5 Gamma Plane (°):0.0-180.0:1.0
 Test Lab: Test Device: GPM-3000
 Test Type: TYPE C Distance: 14.040 m [K=1.0000]
 Temperature: 30.2 'C Humidity:
 Operator: Inspector:



ColorQuick™
Selectable Color Technology

Switch to/from the following CCT



Dark Sky Compliant
when angled at
0° horizontal plane
(35W & 55W)

